

XTREME BOATS

LIGHTER, STRONGER, FASTER
FOR THE HIGHEST PERFORMANCE

TOTAL PERFORMANCE REPORT

WWW.XTREMEBOATS.COM

850-547-9500

TEST DAY DATA

Test Date	Dec-12
Test Conductor(s)	BH/AF
Boat Weight As Tested	1475
Air Temperature	55F
Elevation	160
Wind Velocity	5
Fresh/Salt Water	Fresh
Weight of Persons during Test	325




PERFORMANCE SUMMARY

Top Speed (MPH @ RPM)	41.0
Acceleration 0 - 20 MPH (Seconds)	5.3
Acceleration 0 - 30 MPH (Seconds)	7.9
Best Fuel Efficiency (MPG @ MPH)	10.3 @20.5

ENGINE SPECIFICATIONS

Engine	Mercury 60	ELPT
Horsepower	60	
Cylinders	3	
Gear Ratio	1.83	

PERFORMANCE CURVE

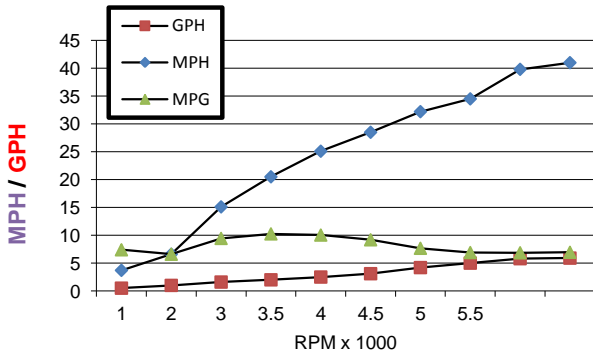

BOAT SPECIFICATIONS

Boat Model	PRO 162 SS
Bottom Style	Full V w Vented Keels
Material	Welded Aluminum
Length	16'2"
Beam	74"
Bottom Width	48"
Hull Bottom Thickness	0.190" (3/16") Aluminum
Max HP Capacity	60 HP
Fuel Tank	Topside
Steering Type	Stick Steering
Dry Boat Weight	695
Transom Height	22"

PERFORMANCE DATA

RPM x 1000	SPEED MPH	FUEL GPH	FUEL MPG
1	3.7	0.5	7.4
2	6.6	1	6.6
3	15.1	1.6	9.4
3.5	20.5	2	10.3
4	25.1	2.5	10.0
4.5	28.5	3.1	9.2
5	32.2	4.2	7.7
5.5	34.5	5	6.9
6	39.8	5.8	6.9
6050	41.0	5.9	6.9

PROPELLER SPECIFICATIONS

Brand	Mercury
Model	Vengeance
Material	SS
Diameter/Pitch	10.38/14
Number of Blades	3

Performance Calculations

Propeller Slippage at WOT	6.46%
Hull Factor (Efficiency)	203.28
Higher = More Efficient	

Xtreme Industries 1326 Old Ridge Road Bonifay, FL 32425

Results on individual boats may vary depending on many factors, including weather and the condition of propeller, lower unit and boat bottom.

850-547-9500 XtremeBoats.com